


KWM - White Metallized (Superior Seal Strength)

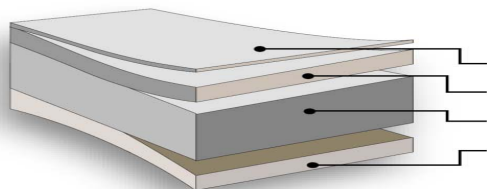

*Vacuum Deposited Aluminum
High Energy Treated Metallizable Layer
White Pigmented Polypropylene Core
Wide Seal Range Layer*

Key Performance Characteristics:

Superior seal strength, white metallized, wide seal range

Applications:

Laminations that require superior seal strength

Technical Data

PROPERTIES	TEST METHOD	UNITS	TYPICAL VALUES
			KWM25
THICKNESS	Internal	mil (μm)	0.95 (24.1)
YIELD	Internal	in ² /lb (m ² /kg)	31,000 (44.1)
HEAT SEAL INITIATION (non-metal side)	1/2 sec, 30 PSI	°F / (°C)	200 / (93)
HEAT SEAL STRENGTH	1/2 sec, 30 PSI @ 248°F (120° C)	g/in	>1,000
TENSILE STRENGTH (MD/TD)	ASTM D882	lb/in ² (kg/cm ²)	16,000 / 23,000 (1,125 / 1,600)
ELONGATION AT BREAK (MD/TD)	ASTM D882	%	160 / 60
DIMENSIONAL STABILITY (MD/TD)	266°F (130°C) 5 min	%	<5 / <3
WATER VAPOR TRANSMISSION RATE (WVTR)	ASTM F 1249 100°F (38°C), 90% RH	g/100in ² /24h (g/m ² /24h)	<0.03 (0.47)
OXYGEN TRANSMISSION RATE (OTR)	ASTM D 3985 72° F(22° C), 0%RH	cc/100in ² /24h (cc/m ² /24h)	<6 (93)

Revision Date: February 2018

The above properties and results obtained refer to the average values of laboratory testing carried out on sample Inteplast product. Inteplast does not guarantee testing accuracy and makes no guarantee of product performance, safety or suitability, either expressed or implied, when used alone or in combination with other products. Inteplast strongly urges users to undertake independent testing in order to verify the suitability of the product for whatever intended use. Inteplast assumes no responsibility for any damage or injury sustained as a result of the use of its products.