


TE - Clear Non Heat Sealable (Enhanced Ink/Coating Adhesion)

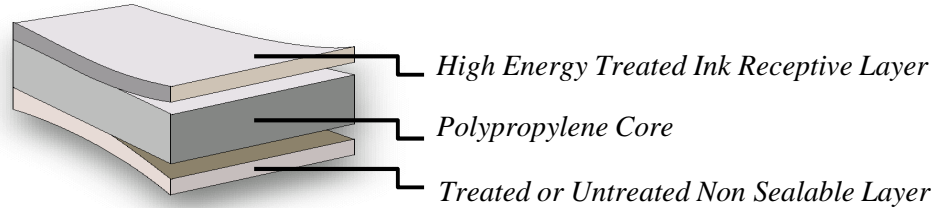

Key Performance Characteristics:

One or two side treated, non heat sealable, excellent ink adhesion, improved extrusion or adhesive lamination bonds

Applications:

In-line printed/coated pressure sensitive tape, other specialty industrial applications requiring strong ink and coating adhesion

Technical Data

PROPERTIES	TEST METHOD	UNITS	TYPICAL VALUES			
			TE18*	TE25	TE30	TE40
THICKNESS	Internal	mil (μm)	0.69 (18)	0.97 (25)	1.16 (30)	1.55 (40)
YIELD	Internal	in ² /lb (m ² /kg)	44,000 (62.5)	31,500 (44.8)	26,200 (37.2)	19,600 (27.9)
HAZE	ASTM D1003	%	3			
GLOSS (45°)	ASTM D2457	G.U.	85			
TENSILE STRENGTH (MD/TD)	ASTM D882	lb/in ² (kg/cm ²)	20,000 / 38,000 (1,400) / (2,700)			
ELONGATION AT BREAK (MD/TD)	ASTM D882	%	150 / 55			
DIMENSIONAL STABILITY (MD/TD)	266°F (130°C) 5 min	%	<5 / <3			
SURFACE ENERGY (high energy side)	ASTM D2578	dyne/cm	40			
SURFACE ENERGY (lower energy side)	ASTM D2578	dyne/cm	36			

*limited availability in this gauge

Revision Date: April 2018

The above properties and results obtained refer to the average values of laboratory testing carried out on sample Inteplast product. Inteplast does not guarantee testing accuracy and makes no guarantee of product performance, safety or suitability, either expressed or implied, when used alone or in combination with other products. Inteplast strongly urges users to undertake independent testing in order to verify the suitability of the product for whatever intended use. Inteplast assumes no responsibility for any damage or injury sustained as a result of the use of its products.