


DM - Metallizable Base Heat Sealable (White)

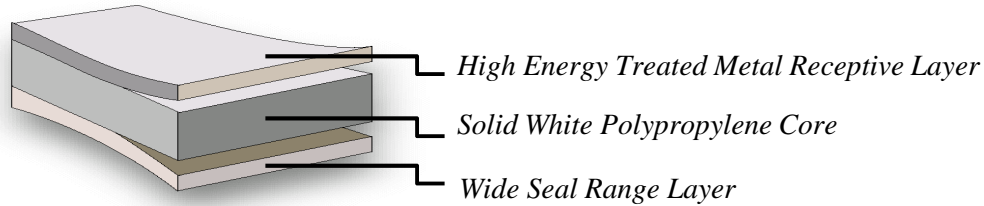

Key Performance Characteristics:

Solid white, one side treated for metal adhesion, one side heat sealable

Applications:

Designed to be metallized for use in extrusion lamination structures for snack packaging

Technical Data

PROPERTIES	TEST METHOD	UNITS	TYPICAL VALUES			
			DM18	DM25*	DM28*	DM35
THICKNESS	Internal	mil (μm)	0.70 (18)	0.98 (25)	1.1 (28)	1.38 (35)
YIELD	Internal	in ² /lb (m ² /kg)	42,900 (61.0)	30,600 (43.5)	27,300 (38.8)	21,800 (31.0)
HEAT SEAL INITIATION (untreated side)	1/2 sec, 30 PSI	°F / (°C)	207 / (97)			
GLOSS (45°)	ASTM D2457	G.U.	52			
OPTICAL DENSITY	ASTM D1003	%	0.23	0.30	0.32	0.35
OPACITY	TAPPI	%	55	65	67	71
WHITE INDEX	ASTM E313	%	80	82	82	83
COEFFICIENT OF FRICTION (non-treat side / non-treat side)	ASTM D1894	Dynamic	0.33			
TENSILE STRENGTH (MD/TD)	ASTM D882	lb/in ² (kg/cm ²)	18,500 / 35,000 (1,300) / (2,450)			
ELONGATION AT BREAK (MD/TD)	ASTM D882	%	155 / 55			
DIMENSIONAL STABILITY (MD/TD)	266°F (130°C) 5 min	%	<5 / <3			
SURFACE ENERGY	ASTM D2578	dyne/cm	40			

*gauge in limited availability or development

Revision Date: April 2018

The above properties and results obtained refer to the average values of laboratory testing carried out on sample Inteplast product. Inteplast does not guarantee testing accuracy and makes no guarantee of product performance, safety or suitability, either expressed or implied, when used alone or in combination with other products. Inteplast strongly urges users to undertake independent testing in order to verify the suitability of the product for whatever intended use. Inteplast assumes no responsibility for any damage or injury sustained as a result of the use of its products.